




Diamond Shine™

UHS FLOOR COATING



SURFACES

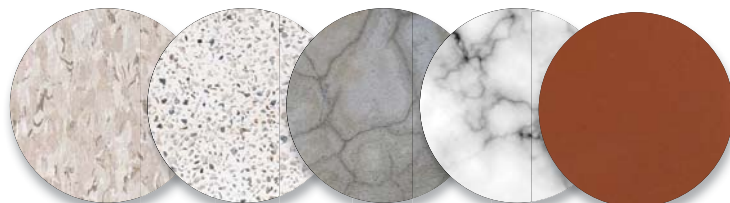

VCT TERRAZZO CONCRETE MARBLE QUARRY
TILE

TECHNICAL DATA

A metal cross-linked, all-purpose, ultra high speed (“UHS”) coating, **Diamond Shine** produces a tough, long lasting base and a diamond-like brilliant wet-look shine in an ultra high speed burnishing program.

DIRECTIONS

Read all directions and Safety Data Sheet (SDS) before using.

1. For a floor that has been stripped, properly neutralized, rinsed and allowed to dry thoroughly, apply 3-6 thin coats of floor finish using a clean synthetic mop. Allow the floor to dry thoroughly between coats and prior to burnishing.
Optional: Apply 2 thin coats of floor sealer for old or porous floors or for high traffic areas, then apply 2-4 coats of finish.
2. For a floor that has been deep scrubbed and allowed to dry thoroughly, apply 1-2 thin coats of floor finish using a clean synthetic mop. Allow floor to dry thoroughly between coats and prior to burnishing.

PRODUCT INFO

Product Code 104L5

Volume 5 liters

Shipping Package 2 x 5 liters

Pallet Quantity 64 cases

Description	Polymer emulsion
Appearance	Milky white liquid
Specular Gloss (60°) ASTM D1455-87 (2008)	>85
Viscosity	< 10mPa.s (dynamic)
Coverage Rate	61 to 74 m ² /liter
Dry Time	about 30 minutes
Buffability	Excellent
Removability (ASTM D1792-06)	Excellent
VOC	8,49%
Non-volatile solids ASTM D2834-95 (2008)	18%
Fragrance	Mild odor, no fragrance added
Slip Resistance ASTM D2047-11	Meets requirements
Shelf Life ASTM D1791-93 (2008)	1 year
Density ASTM D1475-13 (2008)	1,03 kg/liter
Detergent Resistance ASTM D3207-92 (2008)	Excellent
Freeze/Thaw ASTM D3209-93 (2008)	Passes 3 cycles

